



total access control

1500 **STAND ALONE**
DIGITAL KEYPAD

ACCESS CONTROL SYSTEM



features

- rugged steel cabinet with stainless steel faceplates
- metal keypads
- PIN (Personal Identification Number) codes are programmable from the keypad
- programmable "hold" code
- EEPROM memory will not lose programmed codes during power outages
- stand-alone keypads can control 2 doors or gates
- slave keypad capability for controlled entry / exit applications (1506 only)



total access control

DKS 1500 SERIES KEYPADS

provide access control for virtually any application where stand-alone digital code entry is desired. These vandal resistant keypads use stainless steel faceplates, galvanized steel sub-plates and are housed in a rugged steel cabinet. Standard style units can be surface or post mounted and flush mount units are designed to be recessed into a wall or column. The "1504 series" adds an intercom sub-station that can be connected to a master intercom system.

TECH SPECS

electrical requirements

1503: 12 to 24-volt AC or DC power

1506: 16-volt AC.
Power transformer included.

output

1503: Form C dry contact relay

1506: Two form C dry contact relays
30 V 1 amp maximum

capacity

model 1503: Two 4-digit codes, two 5-digit codes

model 1506: 10, 50, 100, 250, 500, 1000 4-digit codes, six 5-digit codes

operating temperature

-10F to 145F

-23C to 62C

features:

Add or delete individual PINs as required from the keypad

"Hold" code can be programmed to latch open a door or gate

Lighted keypads (1503 is available in a non-lighted version)

1506: Time zone inputs
Slave keypad capability

Intercom:

Model 1504 combines the 1503 or 1506 keypad into a common housing with an intercom sub-station. Master intercom station (not provided) is required to connect the 1504. May not be compatible with some intercom systems.

dimensions

surface mount

1503, 1506: 6.25"H x 5.25"W x 4.375"D

1504: 6.125"H x 10"W x 5.25"D


flush mount

Keypad with trim ring:
8.375"H x 7.125"W x 4.0"D

Rough-in box:
7.0"H x 5.625"W x 4.0"D

1503 non-lighted

5.375"H x 4.5"W x 5.25"D

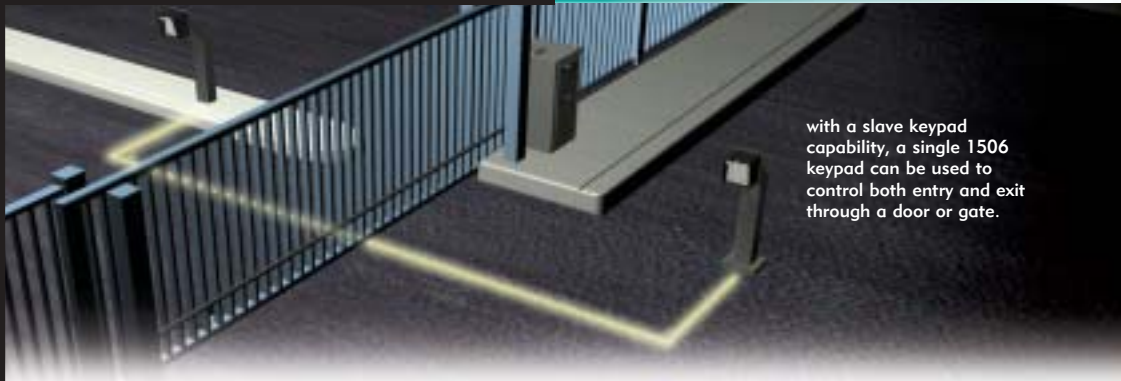

with a slave keypad capability, a single 1506 keypad can be used to control both entry and exit through a door or gate.



lighted keypads
for easy night time operation



keypad
User's enter their 4-5 digit unique PIN (personal identification number) to gain entry



vandal resistant
Housed in rugged steel cabinets with a stainless steel faceplate makes these devices vandal resistant

Illustration Purposes Only



model 1503: Two 4-digit codes, two 5-digit codes

model 1506: 10, 50, 100, 250, 500, 1000 4-digit codes, six 5-digit codes


2 mounts

Surface & flush are available



model 1504

combines the 1503 or 1506 keypad into a common housing with an intercom sub-station.



intercom

1504 can be used with some existing intercom systems



1503-080

2 access codes and unlit casing for economical use

