

SK-KP-SA SERIES

Weather-Proof Stand-Alone Digital Keypads for 200 Users



SK-KPS-SA
Switchplate



SK-KPF-SA
Flush



SK-KPI-SA
Illuminated

Virtually Indestructible Stand-Alone Keypads

Secura Key's new line of stand-alone keypads provide convenient and reliable access control for up to 200 users. Four- to eight-digit PIN codes can be selected, with 10 million possible combinations. Codes can be added or deleted right at the keypad in seconds.

Secura Key keypads utilize the latest in solid-state piezo switch technology. There are no moving parts or buttons to stick or wear out. The units are made of a single piece of aluminum with fully potted electronics inside. These designs are able to withstand extremes of temperature, wetness and dust, meeting IP68 standards for water proofing and a variety of MIL specs. The anodized graphics will never wear off. CLICK-N-LOCK mounting screw protection for added vandal resistance.

Secura Key stand-alone keypads operate at 12 VAC or 12-24 VDC and the non-volatile memory is impervious to power failures. A form C relay controls all types of electric locks and gate operators. A remote open input, LEDs and audible buzzer are standard features.


- NO MOVING PARTS
- SOLID METAL HOUSING
- VANDAL PROOF
- TAMPER PROOF
- WEATHER PROOF
- WATER PROOF
- MEETS MIL STANDARDS



SK-KPM-SA
Mullion

SK-KP-SA SERIES SPECIFICATIONS

All dimensions are indicated in inches.

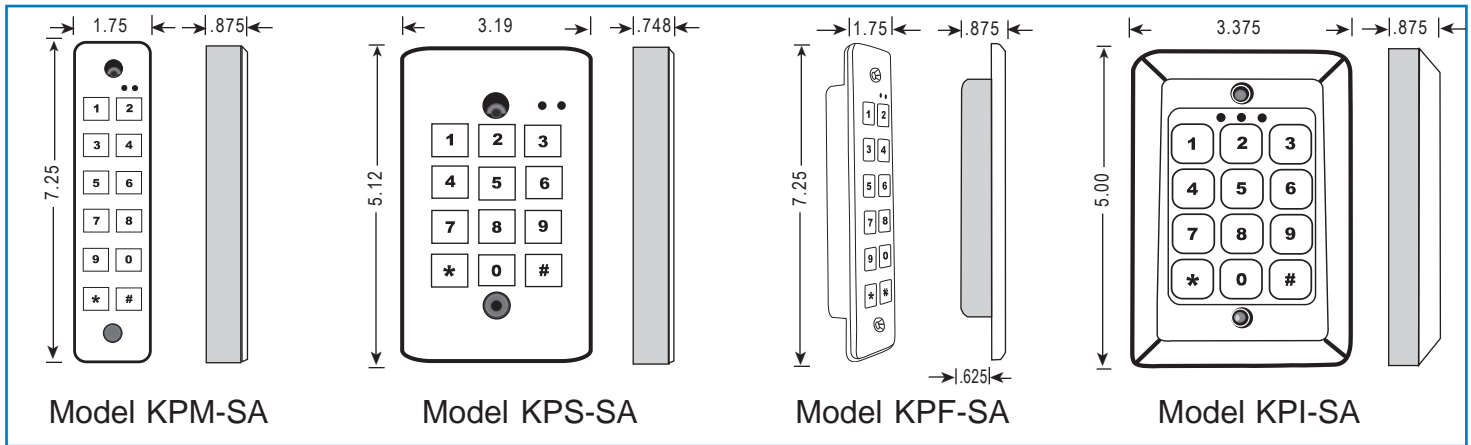

PHYSICAL SPECIFICATIONS

	MODEL SK-KPM	MODEL SK-KPS	MODEL SK-KPF	MODEL SK-KPI
Depth	.875" (2.22 cm)	.748" (1.90 cm)	.875" (2.22 cm)	.875" (2.22 cm)
Width	1.75" (4.45 cm)	3.19" (8.10 cm)	1.75" (4.45 cm)	3.375" (8.57 cm)
Height	7.25" (18.4 cm)	5.12" (13.0 cm)	7.25" (18.4 cm)	5.00" (12.7 cm)
Weight	11.5 oz. (250 gm)	14.1 oz. (244 gm)	10.0 oz. (244 gm)	17.5 oz. (496 gm)
Material	Aluminium	Aluminium	Aluminium	Aluminium
Color	Natural	Natural	Natural	Gold Tone

POWER REQUIREMENTS

12VAC or 12-24 VDC, 30 mA

LED CONTROL

LEDS
KPM, KPS, KPF: Two (red & green)
KPI: Three (red, green & yellow)

ENVIRONMENTAL

Ambient Temperature -40° to +257°F (-40° to +125°C)
Humidity 100% (IP68)

CABLE REQUIRED

4-6 conductor 18-20 AWG cable.

OUTPUTS

KPS, KPM, KPF One Form C
KPI Two Form C (Independent)

INPUTS

KPS, KPM, KPF Remote Open (dry contact only)
KPI No Inputs

This product complies with IP68 (water resistance), MIL Standard 810C, 202E, 461B, 462 UL & CE

WARRANTY (U.S. and Canadian)

"This product is warranted against defects in materials and workmanship for a period of 2 years from the date of purchase. Secura Key shall, at its option, either replace or repair this product, if returned to us freight prepaid within the warranty period. This warranty does not include freight, taxes, duties, or installation expenses. THE WARRANTY SET FORTH ABOVE IS EXCLUSIVE AND NO OTHER WARRANTY, WHETHER WRITTEN OR ORAL, IS EXPRESSED OR IMPLIED. SECURA KEY SPECIFICALLY DISCLAIMS ANY IMPLIED WARRANTIES OR MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. The remedies provided herein are the buyers' sole and exclusive remedies. In no event shall Secura Key be liable for direct, indirect, special, incidental or consequential damages (including loss of profits), whether based on contract, tort or any other legal theory." Contact Secura Key for Card/Tag and Export Warranty Policies.

DISTRIBUTED BY:

Secura Key
A Division of SOUNDCRAFT Inc.

20447 NORDHOFF STREET
CHATSWORTH, CA 91311
PHONE (818) 882-0020 • FAX (818) 882-7052
TOLL-FREE (800) 891-0020
Website: www.securakey.com
E-mail: mail@securakey.com